
Commercial ColorTouch Thermostat T6950

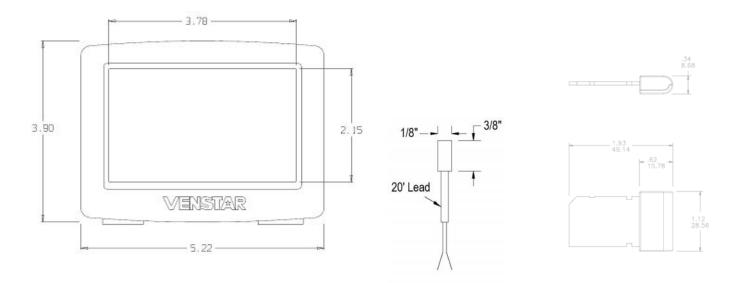

STANDARD FEATURES:

- For use with gas/electric, heat pump and electric units up to 4-stages of heat, 2-stage cool
- 365-day programmable, 7, 5/2, 1-day or non-programmable
- Up to 3 occupied time periods per day
- Full color touchscreen with customizable wallpaper and screen savers
- Customizable service alerts that can display dealers' name, full color logo and phone number
- High resolution touchscreen display with 4.3" diagonally viewing area
- 3 advanced security levels with customizable 4-digit passcode for full screen lock
- Humidification setpoint of 0% ~ 60% on AUX contact
- Dehumidification setpoint of 25% ~ 99% on AUX contact with selectable reheat feature
- Cool to Dehumidify with selectable 0 ~ 20F overshoot
- Energy Watch keeps track of energy use by tracking heating, cooling and override hours
- Override button adjustable in 30 min. increment (up to 4 hours)
- Preoccupancy purge feature, allows the fan to be turned on in 15-minute increments (up to 3 hours)
- Heating and cooling setpoint limiting with adjustable dead bands and timers
- Smart Fan (keeps the fan from running during unoccupied periods)
- Optional auxiliary heat lockout based on outdoor temperature
- All programming and setpoints stored in non-volatile memory and are never lost in power failure
- Diagnostic testing mode for technicians to exercise all outputs at installation
- Emergency Heat switch when set in heat pump mode
- Includes auto lead/lags of Y1 and Y2 compressors on Gas/Electric units
- Service filter, service UV lamp alerts can be sent to email address
- Accepts standard SD card (not included) to upload photos, settings and dealer logo
- Includes duct temperature sensor part# ACC-DSEN to assist in remote diagnostics and troubleshooting
- Includes Wi-Fi Key part number ACC0454 for to allow remote access, monitoring and control
- Accepts optional wall plate part number ACC-WPLWH

MODEL:	T6950	QUANTITY:	DATE:
JOB NAME:			
LOCATION:			
BUYER:			BUYER P.O.#:
ENGINEER:			